


EE-SMD Coilformers (fm)

The coilformers are made in gfr Polyphenylene Sulfide PPS of type torA504 (RTI long-range temperature 130°C) and are suitable for reflow soldering.

Pin material: tin bronze, tinned.
Special materials – e.g. irradiated
cross-linked – and designs on
request, dimensions in mm/*inch*).

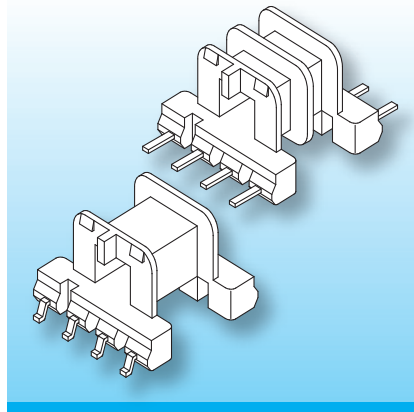


The coilformers have “gull-wing” terminals.

To prevent melt-out, these should ideally be mechanically fixed when soldering on the wires.

The coilformers are available with single or double sections. Automatic placing of the coilformers is possible by using a Pick and Place Cap.

Type	Order-Code	Accessories
Coilformer: EE 5-SMD1/1k/6f-625-/torA504	92 1 6 4 - 1 3 2	Pick and Place Cap P-EE 5
Coilformer: EE 5-SMD1/2k/6f-625-/torA504	92 1 7 2 - 1 3 2	Potting Box EE 5/vla
Solder-pin: fm625-30/ub	75 8 0 1 - 2 1 3	
Solder-pin: f625-30/ub	75 8 5 0 - 2 1 3	

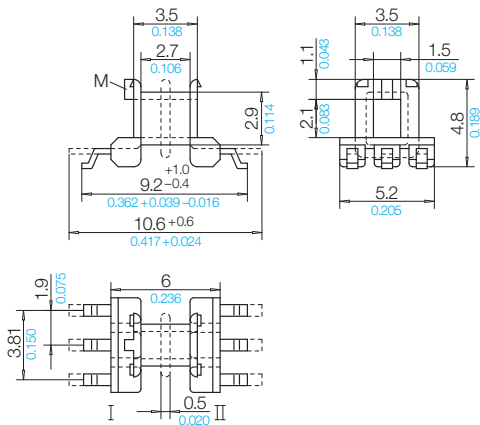

Pin Connecting Surface

View pin-side

