


M 42 – M 102b

Coilformer elements

The components are made in gfr Polyamide PA66 of type p6g (RTI long-range temperature +125° C). Pin material is tin bronze, tinned or brass, tinned for tags. Maximum solder temperature 350° C, 2 sec. Special materials – e.g. irradiated cross-linked – and designs on request, dimensions in mm/*inch*.

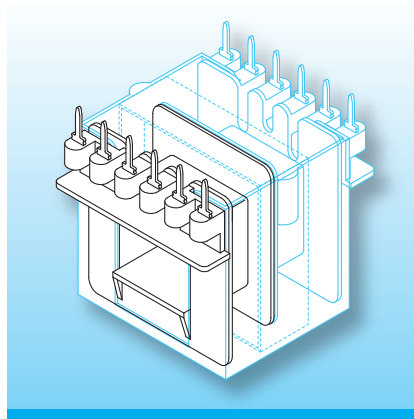


The coilformer elements are sorted according to size. The primary and secondary areas can be wound in separate working steps and the design also permits different connection systems.

The selection of components listed below and marked according to design A, B or C is essential to a complete coilformer.


Type	Order-Code	Component-Selection
Coilformer: M 42/z/2g2-/5.0-k/p6g	03106-024	1 x M 42/x/2g2-/5.0-k
Solder-tag: g2s/wd	71040-261	1 x Thermoclip (on request)
Solder-tag: s11/wc	75315-259	

- A** 1 x housing M 42/i
1 x frame M 42/r
- A** 1 x housing M 42/t
1 x frame M 42/r

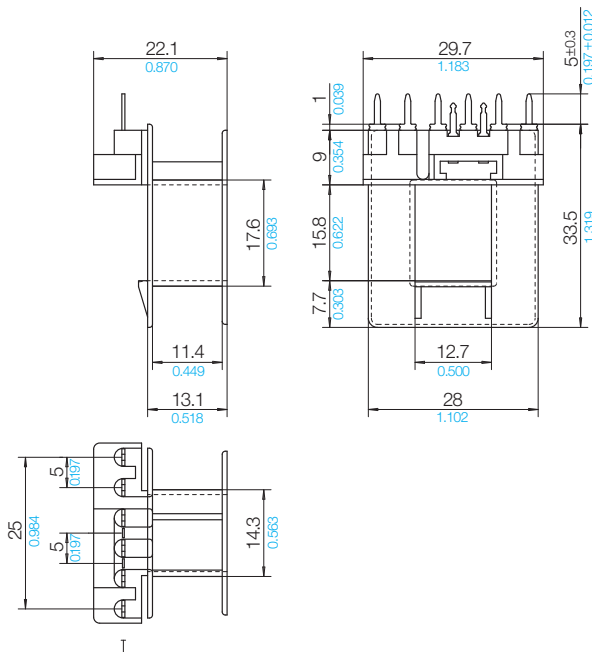

Grid

View tag-side



Stand 07/2012 | © 2026 NORWE ONE GmbH

All dimensions in mm/inch

The permissible deviations according to DIN 16901 apply as tolerances

Warranties:
refer to Terms and Conditions of Sale

NORWE ONE GmbH

Postfach 13 56
51691 Bergneustadt
Paulstraße 5, Pernze
51702 Bergneustadt
Deutschland

NORWE Inc.

P.O. Box 25 11
North Canton, OH 44720-0511
United States of America

Telefon +1-330 497-8113
E-mail usa@norwe.com
Internet www.norwe.com



Telefon +49 (0) 27 63-807-0
WhatsApp +49 2763 807-0
E-mail verkauf@norwe.de
Internet www.norwe.de
www.norwe.eu