


## EI, UI Coilformers


The coilformers are made in Polyamide PA66 gfr, UL 94 HB, temperature for longterm use at +130 °C. The material used is tin bronze, tinned (solder-pins) or brass, tinned (solder-tags). Maximum solder temperature 350 °C, 2 sec. (Special materials and designs on request, dimensions in mm/*inch*).

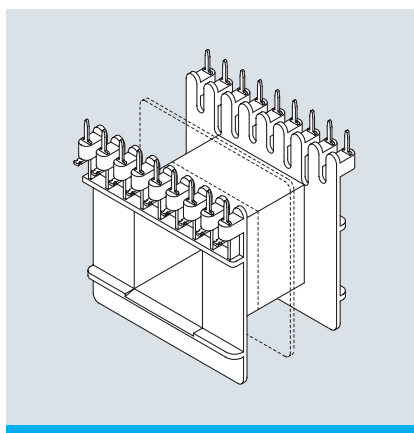

Due to their designs with different connection systems (press-fit pins, bent over pins, soldertags, etc.) the coilformer-versions allow radial as well as axial binding on of the wires, matching your individual fields of application.

We are about to draw up a catalogue of this extensive series step by step – you will find the latest survey of available components on our homepage. For special designs and dimensions as well as available accessories please contact our technical specialists.

| Type                                 | Order-Code | Accessories |
|--------------------------------------|------------|-------------|
| Coilformer: EJ 66/1k/2g2-/5.0-qq/p6g | 06730-024  |             |
| Coilformer: EJ 66/2k/2g2-/5.0-qq/p6g | 06731-024  |             |
| Solder-tag: g2c/wc                   | 71070-259  |             |
| Solder-tag: g2r/wc                   | 71150-259  |             |

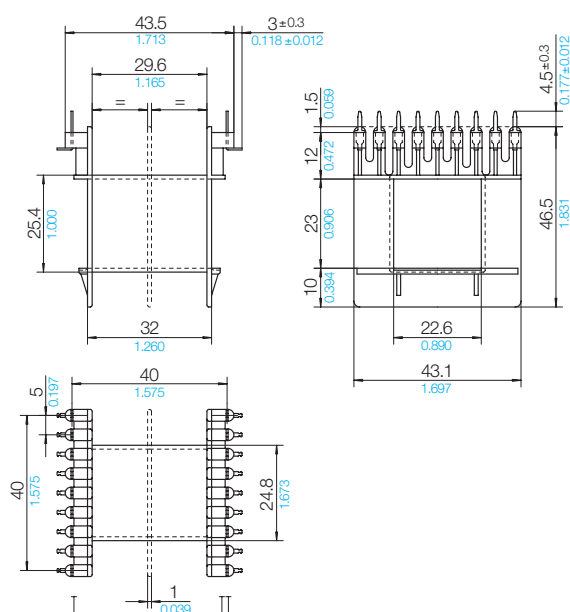

## Grid

View tag-side

