


Toroidal Core Potting Box (RH)

The potting boxes are made in gfr Polyamide PA66 of type p6g (RTI long-range temperature +125 °C). Pin material: tin bronze, tinned. Maximum solder temperature 350 °C, 2 sec. Special materials – e.g. irradiated cross-linked – and designs on request, dimensions in mm/[inch](#).

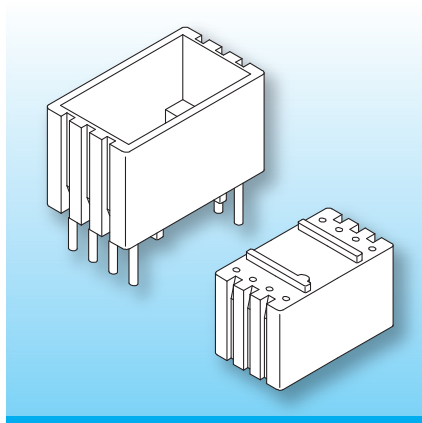


Potting boxes in half height design for glueing and half potting. Easy wire routing through external grooves. "Stand offs" on the bottom of the boxes avoid cold-solder joints into the pcb.


Type	Order-Code	Accessories
Box: RH 17-8/-8/2.5-dg/p6g Solder-pin: z808/ua	66211-024 73294-212	on request

wound toroidal core

diameter Ø 17.4/[Ø 0.685](#)
width 8.4/[0.331](#)

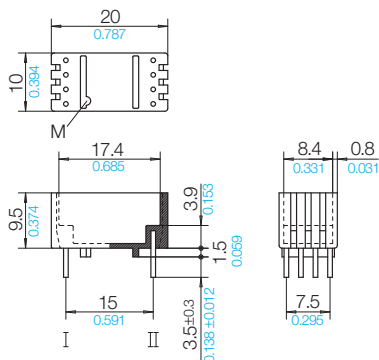

Grid View pin-side



© 04/2014 by NORWE ONE GmbH

Warranties:
refer to Terms and Conditions of Sale

NORWE ONE GmbH

Paulstraße 5, Pernze
51702 Bergneustadt
Deutschland
Telefon +49 (0) 2763-807-0
WhatsApp +49 2763 807-0
E-mail verkauf@norwe.de
Internet www.norwe.de
www.norwe.eu

NORWE Inc.

P.O. Box 25 11
North Canton, OH 44720-0511
United States of America
Telefon +1-330 497-8113
E-mail usa@norwe.com
Internet www.norwe.com



Valid version of
data sheet online

QR Online-Version